


Universal Stand Installation Guide


1 Package Contents


Please verify that you received the following items with your package content.

BM05911: Universal Stand (Small Size)			
Stand Package	Small Size Stand	☐ 2PCS	
	Thumb Screw	☐ 4PCS	
Tube Package	Small Size Tube	☐ 2PCS	
	M4xL35 Screw	☐ 4PCS	
	M6xL41 Screw	☐ 4PCS	

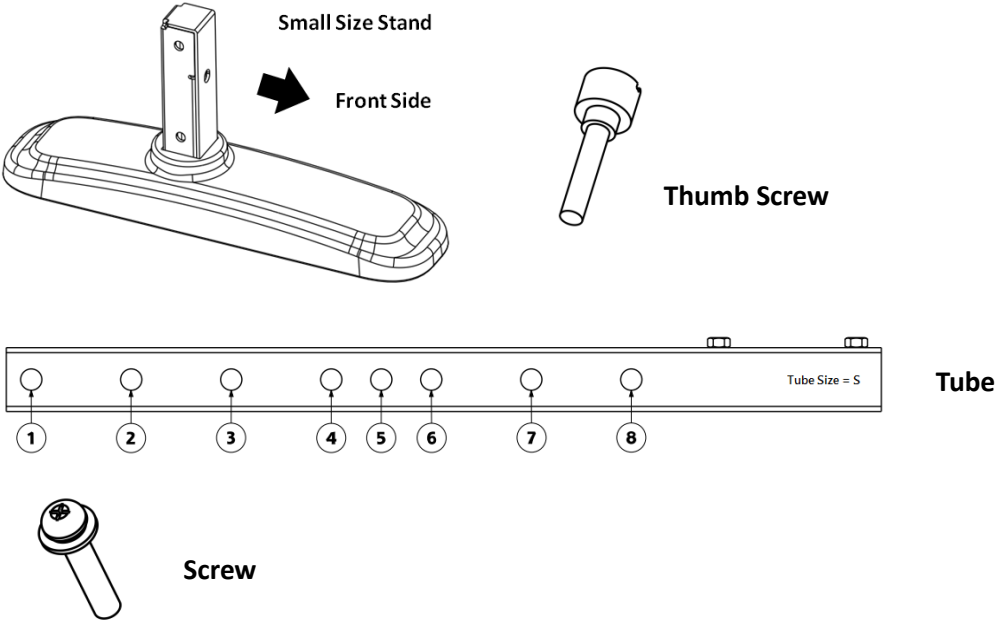

BM05922: Universal Stand (Large Size)			
Stand Package	Large Size Stand	☐ 2PCS	
	Thumb Screw	☐ 4PCS	
Tube Package	Large Size Tube	☐ 2PCS	
	M6xL45 Screw	☐ 4PCS	
	M6xL50 Screw	☐ 4PCS	
	M8xL45 Screw	☐ 4PCS	

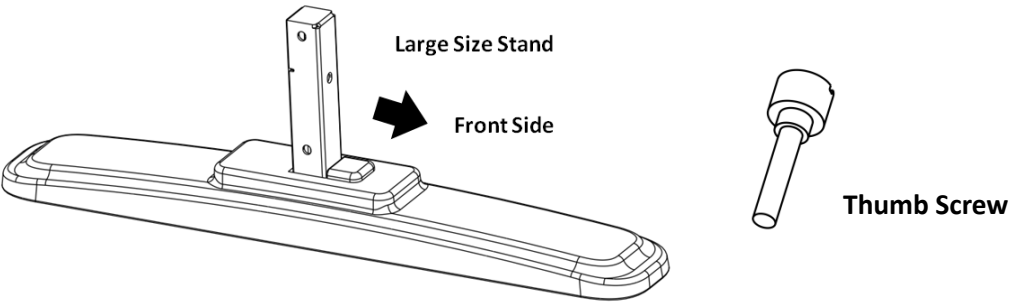

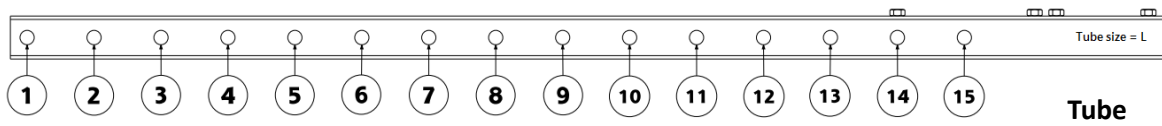


Screw

2 Installation Process

Please follow this instruction to assembly the universal stand.


Step 1 – Put on the table


Lay a protective sheet on a table, which was wrapped around the display when it was packaged, beneath the screen surface so as not to scratch the screen face.

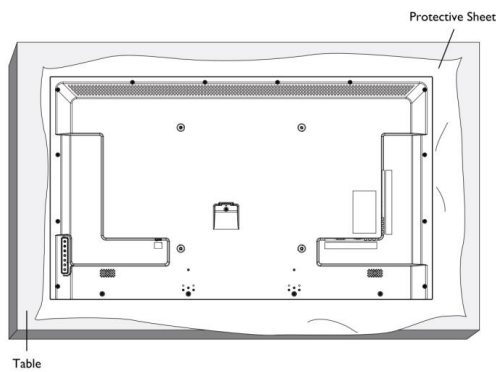

Step 2 – Fix the tube to the display (by using wall mount screws)

Refer to the following table to find out the position of screws.

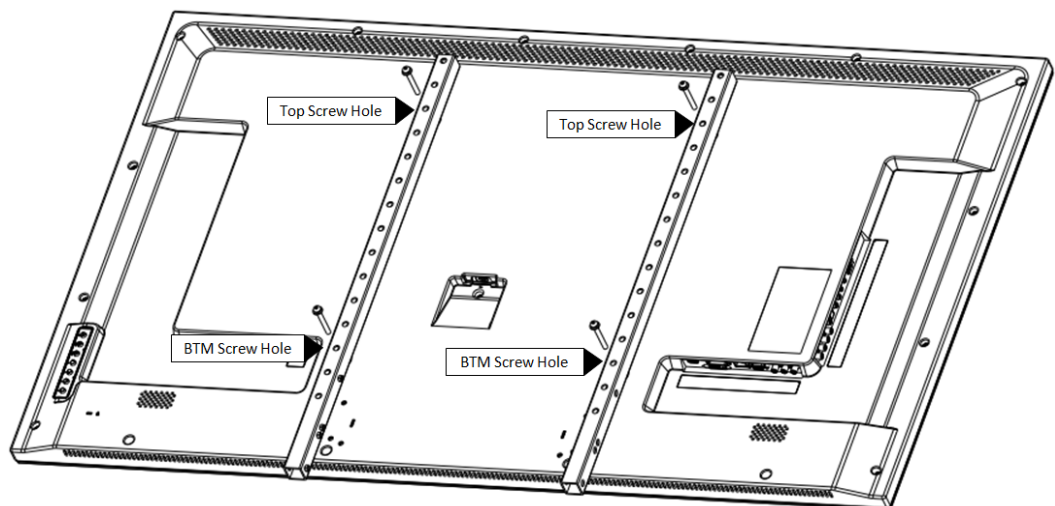

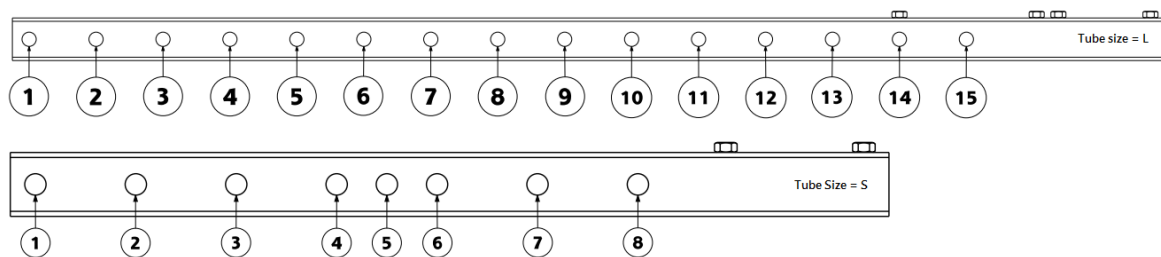


Series	Module Name	Tube Size	Top screw position	Bottom screw position	Wall Mount Screw	Wall Mount Grid	
50EL	BDL3250EL	S	1	7	M6xL45	400mm x 200mm	
	BDL4250EL	L	8	13	M6xL41		
	BDL4650EL	L	5	15	M6xL45	400mm x 400mm	
	BDL5551EL	L	4	14			
60EL	BDL3260EL	S	1	7	M6xL45	400mm x 200mm	
	BDL4260EL	L	8	13	M6xL41		
	BDL4660EL	L	5	15	M6xL45	400mm x 400mm	
	BDL5560EL	L	4	14			
65EL	BDL4765EL	L	5	15			
70EL	BDL4270EL	L	8	12			
	BDL4970EL	L	5	15			
	BDL5570EL	L	4	14			
71VL	BDL4271VL	L	8	13	M6xL41	400mm x 200mm	
	BDL4671VL	L	5	15	M6xL45	400mm x 400mm	
	BDL5571VL	L	4	14			
80VL	BDL4280VL	L	8	13	M6xL41	400mm x 200mm	
	BDL4680VL	L	5	15	M6xL45	400mm x 400mm	
	BDL5580VL	L	4	14		200mm x 200mm	
90VL	BDL4290VL	L	8	12			
	BDL4990VL	L	5	15		400mm x 400mm	
	BDL5590VL	L	4	14			
20QL	BDL3220QL	S	2	5	M6xL41	200mm x 100mm	
	BDL4220QL	L	5	15	M6xL45	400mm x 400mm	
	BDL4620QL	L	5	15			
	BDL5520QL	L	3	13	M6xL50		
	BDL6520QL	L	2	12	M8xL46		
30QL	BDL3230QL	S	2	5	M4xI35	100mm x 100mm	
	BDL4330QL	L	5	15	M6xL41	400mm x 400mm	
	BDL4830QL	L	5	15			
	BDL5530QL	L	4	14			
35QL	BDL4335QL	L	5	15			
	BDL4835QL	L	5	15			
	BDL5535QL	L	4	14			
QT	BDL6524QT	L	1	11	M8xL46		
	BDL6526QT	L	2	12			
4050D	32BDL4050D	S	1	7	M6xL41	200mm x 200mm	
	43BDL4050D	L	5	15		400mm x 400mm	
	49BDL4050D	L	5	15			

Series	Module Name	Tube Size	Top screw position	Bottom screw position	Wall Mount Screw	Wall Mount Grid
4050D	55BDL4050D	L	3	13	M6xL41	400mm x 400mm
	65BDL4050D	L	2	12		
4051T	43BDL4051T	L	5	15		
	55BDL4051T	L	3	13		
3000Q	65BDL3000Q	L	2	12		
3010T	65BDL3010T	L	2	12	M6xL45	

Step.3 – Set up the Stand (by using thumb screws)

Refer to the following table to find out the suitable stand.

* Longer side of stand should face to the front side of display.

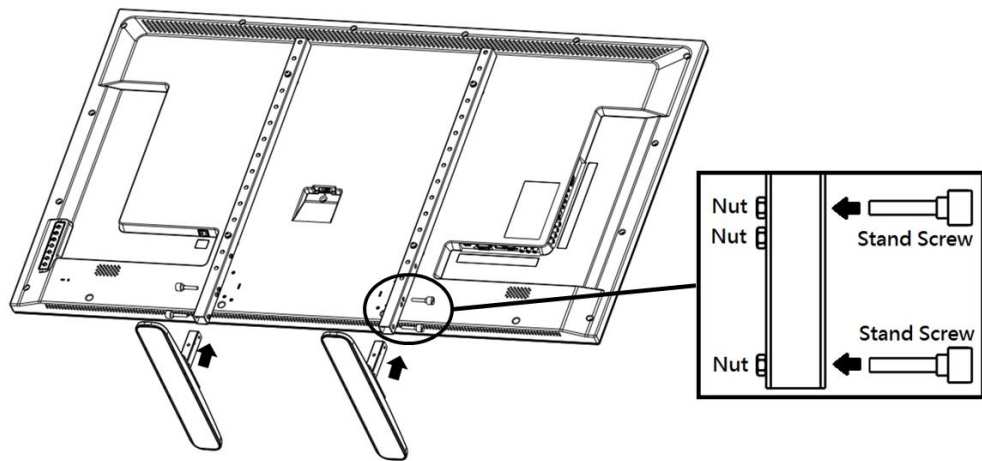

Series	Module Name	Suitable Stand Size
50EL	BDL3250EL	S
	BDL4250EL	L
	BDL4650EL	L
	BDL5551EL	L
60EL	BDL3260EL	S
	BDL4260EL	L
	BDL4660EL	L
	BDL5560EL	L
65EL	BDL4765EL	L
70EL	BDL4270EL	L
	BDL4970EL	L
	BDL5570EL	L
71VL	BDL4271VL	L
	BDL4671VL	L
	BDL5571VL	L
80VL	BDL4280VL	L
	BDL4680VL	L
	BDL5580VL	L
90VL	BDL4290VL	L
	BDL4990VL	L
	BDL5590VL	L

Series	Module Name	Suitable Stand Size
20QL	BDL3220QL	S
	BDL4220QL	L
	BDL4620QL	L
	BDL5520QL	L
	BDL6520QL	L
30QL	BDL3230QL	S
	BDL4330QL	L
	BDL4830QL	L
	BDL5530QL	L
35QL	BDL4335QL	L
	BDL4835QL	L
	BDL5535QL	L
QT	BDL6524QT	L
	BDL6526QT	L
4050D	32BDL4050D	S
	43BDL4050D	L
	49BDL4050D	L
	55BDL4050D	L
	65BDL4050D	L
4051T	43BDL4051T	L
	55BDL4051T	L

Series	Module Name	Suitable Stand Size
3000Q	65BDL3000Q	L
3010T	65BDL3010T	L