



Philips Signage Solutions  
LED Display

44"

Direct View LED

**SignageSolutions**



44BDL8148L

## Limitless

Bezel-free LED display wall.

Fill their imagination. Create seamless displays. With an L-Line Professional LED Display Wall, the possibilities are endless. The bezel-free design, wide viewing angle and breathtaking brightness ensure authoritative imaging. At any size.

### **Spectacular picture. Endless possibilities.**

- LED display. Superb image quality. Perfect uniformity
- Ultra-high brightness even at wide viewing angles
- Zero bezel. Create seamless display screens

### **Effortless setup. Reliable performance.**

- Join multiple cabinets to achieve higher resolution
- High-performance gold-wire LEDs
- Front-access LED modules. Easy maintenance and servicing
- Built-in rear cable cover. Easy cable management

### **Immersive viewing. Versatile LED solution.**

- Ultra-thin pixel pitch of 4.8 mm. Beautiful at any size
- Ultra-high refresh rate. Smooth, judder-free images
- Create bezel-free video walls of any shape or size
- Perfect clarity. From broadcast studio to control room

**PHILIPS**

# Specifications

## Picture/Display

- Brightness before calibration: 1000 nits
- Brightness after calibration: 800 nits
- Colour Temperature default: 6500±500 K
- Viewing Angle (H / V): 140 / 140 degree
- Brightness Uniformity: >=97%
- Contrast ratio (typical): >=3000:1
- Calibration (Brightness/Colour): Supported
- Refresh rate (Hz): 1200~1920
- Frame Frequency (Hz): 50 & 60
- Colour Temperature adjust range: 4000~9500 K (by software)
- Aspect ratio: 1:2
- Picture enhancement: Dynamic contrast enhancement, Wide Colour Gamut display
- Placement: Portrait
- Usage: 24/7 hrs, Indoor

## Convenience

- Signal Control Loop Through: RJ45
- Ease of installation: Guide pins, Light weight, Locking mechanism for cabinet
- Power loop through: For 230 V environments: 3 cabinets or less, for 110 V environments: 3 cabinets or less

## Operating conditions

- Temperature range (operation): -20~45 °C
- Temperature range (storage): -20~50 °C
- Humidity range (operation)[RH]: 10~80%
- Humidity range (storage) [RH]: 10~85%

## Power

- Cabinet Max Power consumption: 220 W
- Consumption (Typical): <=73 W
- Input Voltage: AC200~240V/AC100-120V (50-60 Hz)
- BTU Value m2: 1500 BTU/m2

## Miscellaneous

- Warranty: 3 year
- Regulatory approvals: FCC SDOC, Part 15, EMC Class A, EN55032, EN55035, EN61000-3-2, EN61000-3-3, IEC/UL60950, IEC/UL62368, IEC62471, RoHS

## Cabinet

- Cabinet Size (mm): 500 x 1000 x 86
- Cabinet Diagonal (inch): 44
- Cabinet Resolution (W x H): 104 x 208
- Weight (kg): 15.6 kg
- Cabinet pixels (Dot): 21,632
- Cabinet Area (m2): 0.5
- Data connector: RJ45
- Power connector: In/Out(C14/C13)
- Cabinet Construction: Aluminium and Steel
- Receiving card Quantity: 1 pcs
- Receiving card Spec: A5S
- Receiving card Brand: Novastar

## Module

- LED Type: SMD 2121 Gold wire
- Pixel constitution: 1R1G1B
- LED Lifetime (Hrs, half bright): 100 000
- Pixel Pitch (mm): 4.81 mm
- Module Size (WxHxD in mm): 250 x 250 x 19.1
- Module Resolution (W x H pixels): 52 x 52

## Accessories

- Power loop through cable: 1 pcs
- LAN cable (RJ45, CAT-5): 1 pcs (130 cm)
- Common connecting piece: 3 pcs
- Screw bolt: 4 pcs (M10\*70) (Inner Hexagon Screw)
- QSG: 1 pcs

# Highlights

## LED display. Superb image

Create bezel-free video walls of any shape, size or resolution. The modular design of Philips Professional LED cabinets means you can adapt to any space. Build vast, immersive installations or assemble intriguing patterns. Easily create video walls that flow seamlessly around doorways and other openings.

## Built-in rear cable cover.

Your Philips Professional LED Display features built-in rear cable covers to keep power and data cables tidy. Display cabinets can also be daisy-chained for both power and data, allowing you to minimise clutter and speed up installation.

## Create bezel-free video walls


Simply connect multiple LED display cabinets to create the resolution you want, whether it's 4K, 8K or even higher. Compared to LCD screens, LED displays boast higher refresh rates that enable smoother images. Whatever the application, you'll thrill them with crystal-clear picture quality.

## High-performance gold-wire LED

Philips Professional LED Displays use high-performance gold-wire LEDs, which are energy efficient and cost effective. The light is brighter and the LEDs last longer.

## Front-access LED modules.

Internal electronics are easy to access for servicing or maintenance. Each of the eight LED modules in a cabinet can be removed using a dedicated magnetic JIG tool, which lifts the module out from the front.

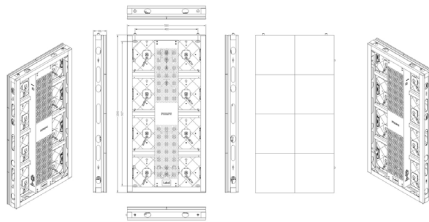

Issue date 2020-04-30

Version: 5.0.1

12 NC: 8670 001 59311  
EAN: 87 12581 75871 4

© 2020 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)